



Technical Data Sheet

RM


METALLIZED ONE SIDE, HEAT SEALABLE ONE SIDE, BOPP FILM

PROPERTIES

- Good metal appearance
- Very good moisture and light barrier

APPLICATIONS

- Suitable to protect light sensitive products
- Thinner gauges used in lamination
- Thicker gauges used in mono web applications
- Excellent oxygen & water barrier

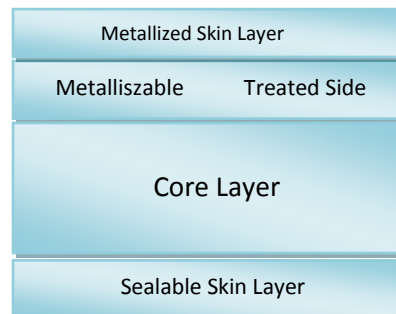

Technical Properties	Units		Typical Values					Method	
Nominal Thickness	Micron		15	18	20	25	30	40	ROWAD
Unit Weight	gm/m ²		13.65	16.38	18.20	22.75	27.30	36.40	ROWAD
Yield	m ² /kg		73.26	61.05	54.95	43.95	36.63	27.47	ROWAD
Optical Density			2.2 ± 0.2					X-RITE	
C.O.F (FxF)			<0.3					ASTMD-1894	
Tensile Strength at Break	MD	N/mm ²	140					ASTM D-882	
	TD	N/mm ²	260						
Elongation at Break	MD	%	180					ASTM D-882	
	TD	%	60						
Dimensional Stability	MD	%	4.0					ROWAD 120°C, 5min/Air	
	TD	%	2.0						
Heat Seal Strength	UT/UT	N/15mm	>2.2	>2.4	>3.0	ROWAD 130°C 1 Bar, 1 Sec			
Heat Seal Range (Un-Treated)	°C		105 – 140					ROWAD 1Bar, 1 Sec	
Water Vapor Transmission Rate	gm/m ² /24hrs		≤0.80					ASTM F1249 38 °C, 90% RH	
Oxygen Permeability	cc/m ² /24hrs		≤80					ASTM D3985 23°C, 0% RH	

MD: Machine Direction, TD: Transverse Direction, FxF: UTR/UTR

STORAGE AND HANDLING

In order to minimize deterioration of the level of surface tension, storage temperature of below 30 °C is recommended for Heat sealable one side metallized films.

PRINTIBILITY/LAMINATION

It is strongly recommended for in line refreshment of metallized surface before processing the material.

FOOD CONTACT

Raw Material used for production of the film is approved by EU and FDA. Specific document and safety data sheet are available on request.

For more information, please contact:

Rowad Global Packaging Company, P.O. Box 14164, Dammam 31424, Kingdom of Saudi Arabia | T: +966 3 8122204 | F: +966 3 8121360